

CS – CLAMSHELL

Split-frame pipe cutting and beveling machine

Split-frame clamshell pipe cutting and beveling machines for cutting, beveling, facing and counterboring pipe or tubing.


- **19 standard models** from 2" to 60" cutting range
- **Split-frame design** for easy mounting
- **Pneumatic, electric and hydraulic** drive options available
- **Ideal for beveling, facing or counterboring** pipe or tubing
- **Wide range of accessories** to meet most applications
- **Larger and customizable** sizes available

2"-60"

CUTTING RANGE



3

DRIVE OPTIONS

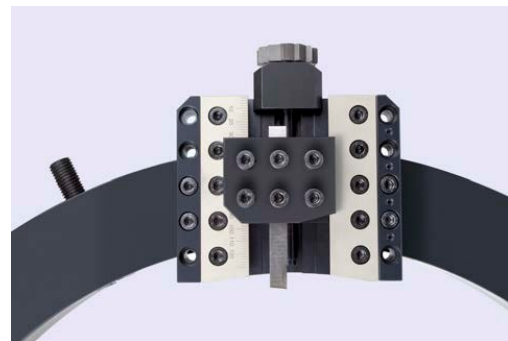

CS – CLAMSHELL

Models, dimensions & shipping data

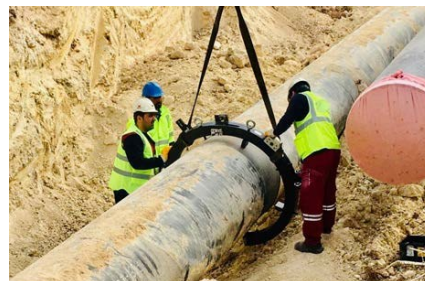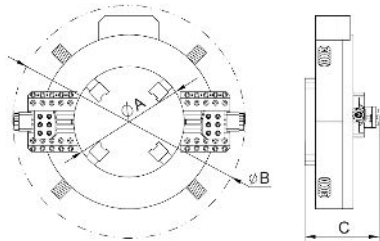

MODEL SELECTION

Model	Working range	A	B	C	Machine weight	Shipping weight	Package size
		in / mm					
CS6	2"-6" 50-168 mm	7.3 185	20.2 512	7.6 192	41.5 kg 91.3 lbs	67.5 kg 148.5 lbs	28.3×25.2×11.4 in 720×640×290 mm
CS8	2"-8" 50-230 mm	9.3 236	22.2 564	7.6 192	42.5 kg 93.5 lbs	75.5 kg 166.1 lbs	27.9×26.8×11.4 in 710×680×290 mm
CS10	4"-10" 114-275 mm	11.1 283	24.1 612	7.6 192	44.5 kg 97.9 lbs	79.5 kg 174.9 lbs	27.9×26.9×11.1 in 710×685×280 mm
CS12	6"-12" 168-325 mm	13.1 334	26.2 665	7.6 192	53 kg 116.6 lbs	88 kg 193.6 lbs	31.5×28.9×10.8 in 800×735×275 mm
CS14	8"-14" 219-377 mm	15.2 386	28.3 719	7.6 192	56 kg 123.2 lbs	94 kg 206.8 lbs	33.1×11.1×11.2 in 840×280×285 mm
CS16	10"-16" 273-426 mm	17.2 438	30.6 776	7.7 195	60 kg 132 lbs	100 kg 220 lbs	35.1×28.1×10.8 in 890×715×275 mm
CS18	12"-18" 300-457 mm	18.5 469	31.8 807	7.7 195	65.5 kg 144.1 lbs	106.5 kg 234.3 lbs	34.6×29.1×11.4 in 880×740×290 mm
CS20	14"-20" 355-508 mm	20.4 519	33.9 862	7.7 195	77 kg 169.4 lbs	122 kg 268.4 lbs	38.9×32.3×12.6 in 990×820×320 mm
CS22	16"-22" 400-560 mm	22.4 570	35.8 910	7.7 195	79 kg 173.8 lbs	127 kg 279.4 lbs	38.9×36.2×13.4 in 990×920×340 mm
CS24	18"-24" 457-610 mm	24.3 618	37.8 960	7.7 195	85 kg 187 lbs	134 kg 294.8 lbs	42.5×35.4×13.8 in 1080×900×350 mm
CS26	20"-26" 508-660 mm	26.4 670	40.2 1020	7.7 195	96 kg 211.2 lbs	150 kg 330 lbs	38.9×33.9×13.4 in 990×990×340 mm
CS28	22"-28" 550-715 mm	28.3 719	42.7 1084	7.8 198	114 kg 250.8 lbs	169 kg 371.8 lbs	40.5×40.5×13.4 in 1030×1030×340 mm
CS30	24"-30" 600-762 mm	30.3 770	44.6 1134	7.8 198	116 kg 255.2 lbs	172 kg 378.4 lbs	42.9×42.9×13.4 in 1090×1090×340 mm
CS32	26"-32" 660-813 mm	32.7 830	47.0 1194	8.1 207	120.5 kg 265.1 lbs	181.5 kg 399.3 lbs	44.8×44.8×13.4 in 1140×1140×340 mm
CS36	30"-36" 762-914 mm	36.4 924	51.0 1296	8.4 214	144.5 kg 317.9 lbs	209.5 kg 460.9 lbs	49.2×49.2×14.9 in 1250×1250×380 mm
CS42	36"-42" 914-1066 mm	42.4 1077	57.8 1468	8.5 216	197.5 kg 434.5 lbs	281.5 kg 619.3 lbs	56.3×31.9×14.9 (×2) in 1430×810×380 (×2) mm
CS48	42"-48" 1066-1230 mm	49.1 1248	64.8 1646	8.5 216	244 kg 536.8 lbs	347 kg 763.4 lbs	64.5×35.8×14.9 (×2) in 1640×910×380 (×2) mm

A = frame ID, B = frame OD, C = frame width. (×2) = ships in two packages.

