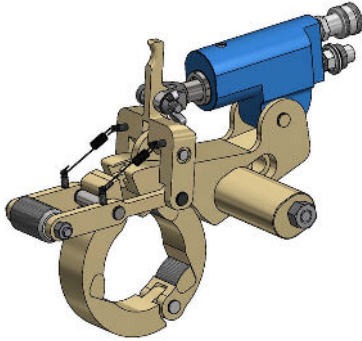


HU TOOL

Hammer union wrench



TorqLite's patented HU Tool clamping wrench is designed specifically to work on Hammer Union connections while eliminating the need for the hammer the connections were named for.

The new and improved HU wrench is capable of fitting all registered Hammer Union sizes. The easy-to-latch heads make installation and set-up simple, while the spring-loaded action provides nearly a completely hands-free operation.

1 3/4"–6 1/2"

"SPLIT HEAD" RANGE

10 5/8"

TOOL HEIGHT

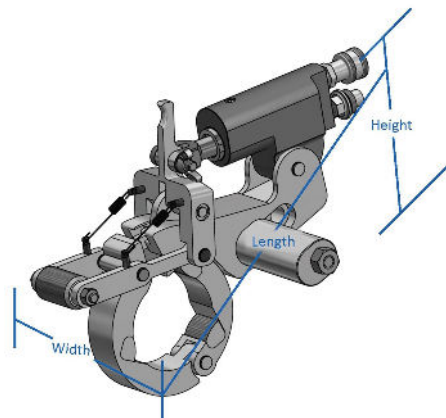
FEATURES

- **Spring head (patented).** The head features the same patented open-gate design as TorqLite's JN Series wrenches, but has a spring-latch feature that makes applying and removing the tool very simple. Fixed to the inside of the head are the jaws, used to clamp the pipe.
- **Safe.** The safety increases exponentially when you remove a hammer from a situation and add a tool that does not require a dangerous swinging motion to operate.
- **Interchangeable heads.** With only the need for one HU Tool, the interchangeable heads are the only thing you'll need to be changing when tightening or loosening Hammer Union connections. Each head includes a welded jaw that clamps to the application and turns as it advances for a more efficient way to work. The HU Tool and the entire range of interchangeable heads will fit on all registered Hammer Union connections.
- **Non-destructive.** Throughout their lifespan, the Hammer Union lugs can take a lot of beatings – literally. The HU Tool reduces the impact on those lugs and eliminates the damage caused by the hammers, saving replacement time and costs.
- **Adjustable reaction.** The adjustable reaction arm allows the HU Tool to fit all registered Hammer Union connections.
- **No hands.** Once the tool is applied to the Hammer Union connection, the operator does not need to use his hands to hold the tool in place. Alternatively, if the operator so chooses, a handle is provided so that he can hold the tool safely.
- **Controlled load.** Since the operator is not striking a hammer, the load is able to be applied to the connection in a stable, constant, and controlled manner.



Enerteq Solutions, Inc.

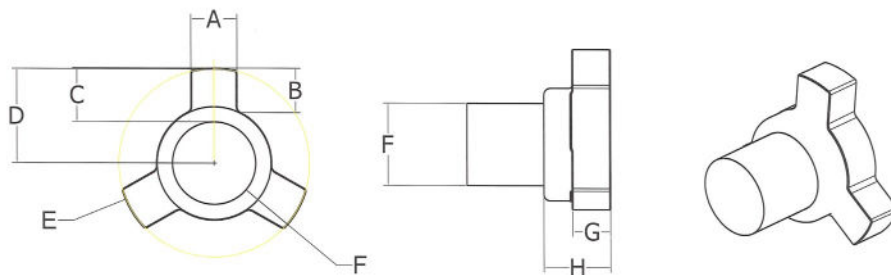
www.flangespreaderrental.com | sales@flangespreaderrental.com | 832.422.2256

TOOL DIMENSIONS

Series	Tool length*	Tool height	Tool width	Reaction bar width	Combined width	"Split head" range
HU	14 7/8"–16 15/16"	10 5/8"	3 1/2"	3 3/4"	5 11/16"	1 3/4"–6 1/2"

*Depending on head size.

The HU Tool will work on any standard torque wrench pump, eliminating the need to purchase a special unit to operate it.

HU SERIES WORKSHEET – HAMMER UNION INFORMATION

Manufacturer e.g. NOV 2004, WECO 1502

Fig no.

NPS Nominal pipe size

(A) Lug width

(B) Lug length

(C) Total lug length

(D) Nut radius

(E) Nut diameter

(F) Pipe size

(G) Lug height

(H) Total height

Most measurements are available with the make and model. If not, please provide the requested dimensions above.