

WJ19K

Hydraulic lifting wedge jack

A hydraulic lifting wedge jack actuated by 700 bar hydraulics.

The WJ19K lifting wedge jack can enter an access gap as small as 9.5 mm and produce a maximum lifting force of 183 kN up to a height of 67.5 mm when 700 bar of hydraulic pressure is applied. Multiple tools can be linked together to produce greater lifting forces.

The WJ19K tools can be used in any orientation, making them suitable for lifting, pushing and spreading applications.

**183 kN**

MAX. LIFTING FORCE

9.5 mm

MIN. ACCESS GAP

67.5 mmMAX. LIFTING HEIGHT
(STEPPED BLOCK)**8.5 kg**

TOOL WEIGHT


FEATURES

- **High durability**, high quality, low maintenance design
- **Forged steel jaws** for strength and safety
- **Comfort handle grip** for easy handling
- **15 mm deep jaw steps** give stability when spreading
- **Parallel action jaw spreading** maintains secure grip
- **Interlocking jaws** give added strength and durability with only 9.5 mm tip width
- **Robust moulded case** for easy transportation and storage

WJ19K

Hydraulic lifting wedge jack

APPLICATION RANGE

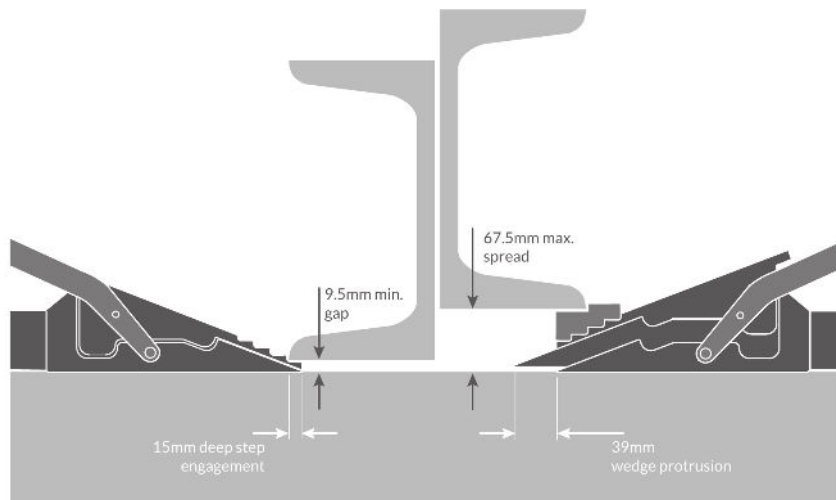

KIT CONTENT

- 1 × WJ19K tool
- 1 × Safety block
- 1 × Safety lanyard
- 1 × Stepped block with securing screw and Allen key
- 1 × Instruction manual
- 1 × Robust moulded carry case

KIT & TOOL DATA

Product ordering code	WJ19K
Kit weight	13 kg (28.7 lbs)
Kit dimensions	580 × 340 × 180 mm (22.8" × 13.4" × 7.1")
Tool weight	8.5 kg (18.7 lbs)
Tool dimensions	105 × 135 × 410 mm (4.1" × 5.3" × 16.1")
Max. lifting force	183 kN
Lifting distance	9.5 mm to 67.5 mm (when used with stepped block)



Complete kit in moulded carry case